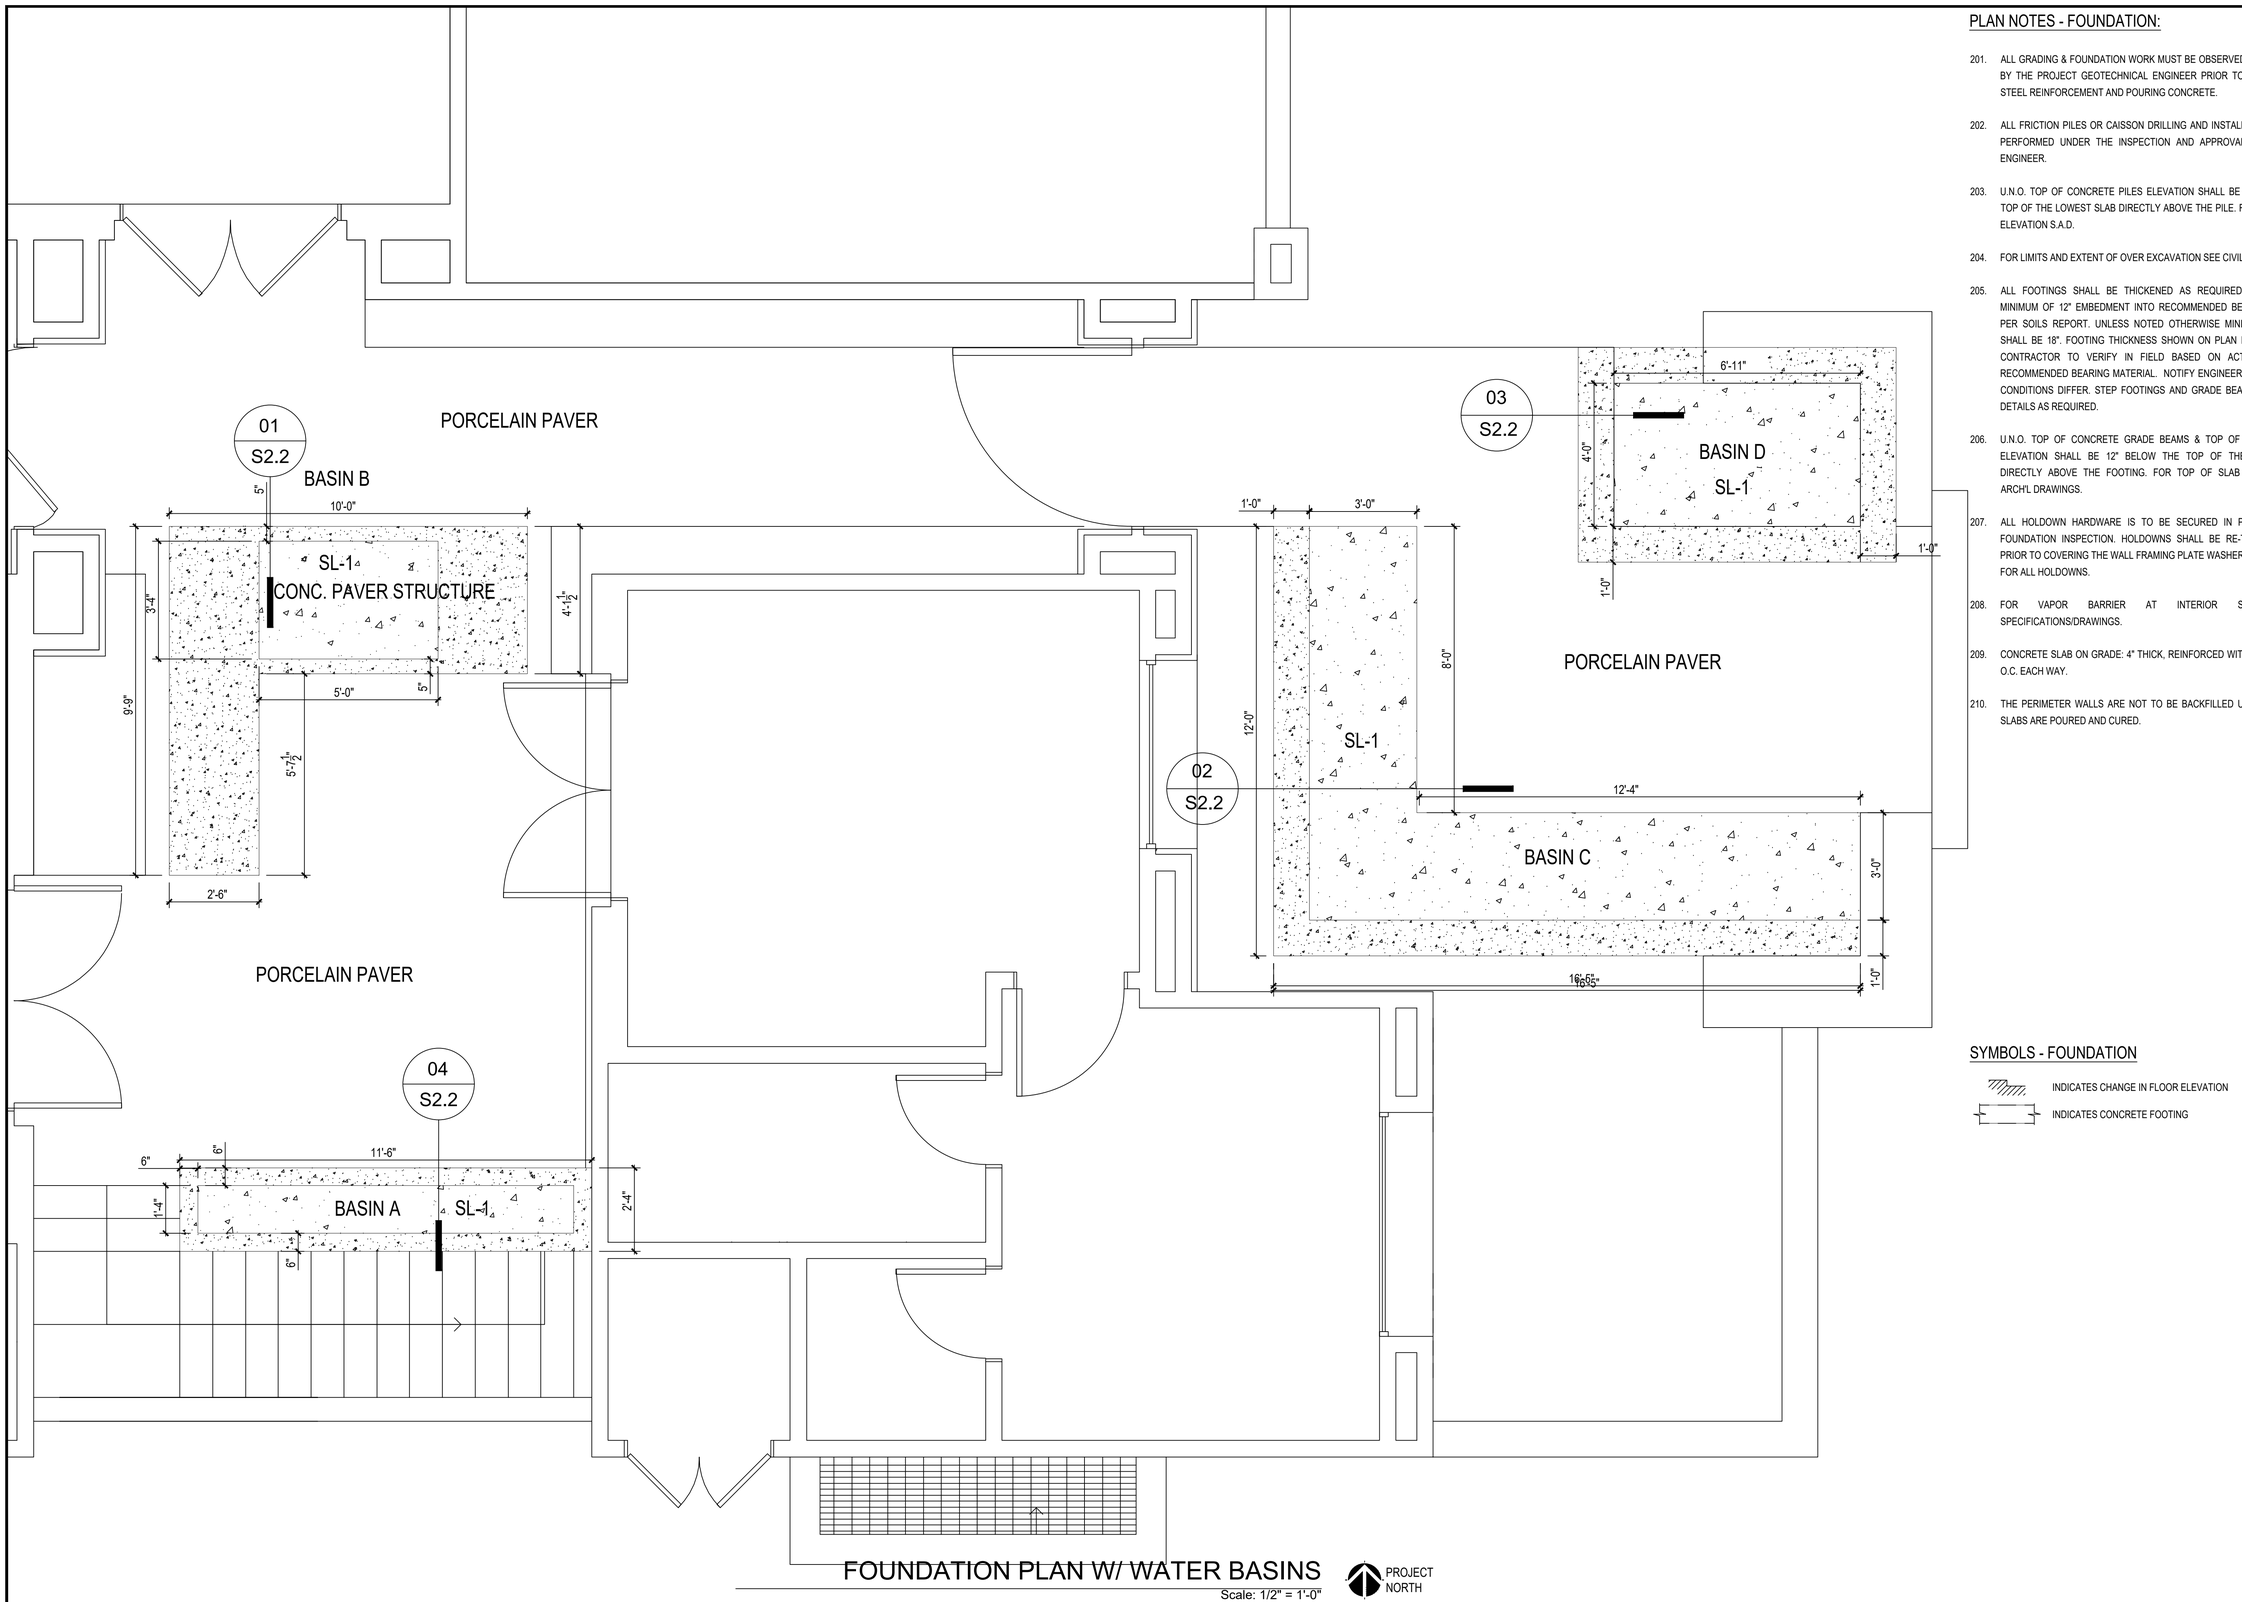


PLAN NOTES - FOUNDATION:

201. ALL GRADING & FOUNDATION WORK MUST BE OBSERVED AND APPROVED BY THE PROJECT GEOTECHNICAL ENGINEER PRIOR TO PLACEMENT OF STEEL REINFORCEMENT AND POURING CONCRETE.

202. ALL FRICTION PILES OR CAISSON DRILLING AND INSTALLATION SHALL BE PERFORMED UNDER THE INSPECTION AND APPROVAL OF THE SOILS ENGINEER.

203. U.N.O. TOP OF CONCRETE PILES ELEVATION SHALL BE 3'-0" BELOW THE TOP OF THE LOWEST SLAB DIRECTLY ABOVE THE PILE. FOR TOP OF SLAB ELEVATION S.A.D.

204. FOR LIMITS AND EXTENT OF OVER EXCAVATION SEE CIVIL DRAWINGS.

205. ALL FOOTINGS SHALL BE THICKENED AS REQUIRED TO ACHIEVE A MINIMUM OF 12" EMBEDMENT INTO RECOMMENDED BEARING MATERIAL PER SOILS REPORT. UNLESS NOTED OTHERWISE MINIMUM THICKNESS SHALL BE 18". FOOTING THICKNESS SHOWN ON PLAN IS APPROXIMATE. CONTRACTOR TO VERIFY IN FIELD BASED ON ACTUAL DEPTH OF RECOMMENDED BEARING MATERIAL. NOTIFY ENGINEER IF ACTUAL FIELD CONDITIONS DIFFER. STEP FOOTINGS AND GRADE BEAMS PER TYPICAL DETAILS AS REQUIRED.

206. U.N.O. TOP OF CONCRETE GRADE BEAMS & TOP OF CONC. FOOTING ELEVATION SHALL BE 12" BELOW THE TOP OF THE LOWEST SLAB DIRECTLY ABOVE THE FOOTING. FOR TOP OF SLAB ELEVATION SEE ARCH'L DRAWINGS.

207. ALL HOLDOWN HARDWARE IS TO BE SECURED IN PLACE PRIOR TO FOUNDATION INSPECTION. HOLDOWNS SHALL BE RE-TIGHTENED JUST PRIOR TO COVERING THE WALL FRAMING PLATE WASHERS ARE REQUIRED FOR ALL HOLDOWNS.

208. FOR VAPOR BARRIER AT INTERIOR SPACES S.A.D. SPECIFICATIONS/DRAWINGS.

209. CONCRETE SLAB ON GRADE: 4" THICK, REINFORCED WITH #4 BARS AT 16" O.C. EACH WAY.

210. THE PERIMETER WALLS ARE NOT TO BE BACKFILLED UNTIL THE FLOOR SLABS ARE POURED AND CURED.

SYMBOLS - FOUNDATION

INDICATES CHANGE IN FLOOR ELEVATION

INDICATES CONCRETE FOOTING

FOUNDATION PLAN W/ WATER BASINS

Scale: 1/2" = 1'-0"

PROJECT NORTH

EVERVAST
MULTIDIMENSIONAL EXCELLENCE

1401 Doug Baker Boulevard
Birmingham, AL 35242
Tel: +1 659-307-9885
Email: info@evervastco.com

PROJECT TITLE:
Proposed Kinnett Residence
Lot 29, 78293 Birkdale Court
La Quinta, CA 92253

PROFESSIONAL SEAL:

REVISIONS:	DATE:

PROJECT NO. :	CLIENT PROJECT:
DRAWN:	CHECKED:

DRAWING TITLE:
FOUNDATION PLAN

S2.1